
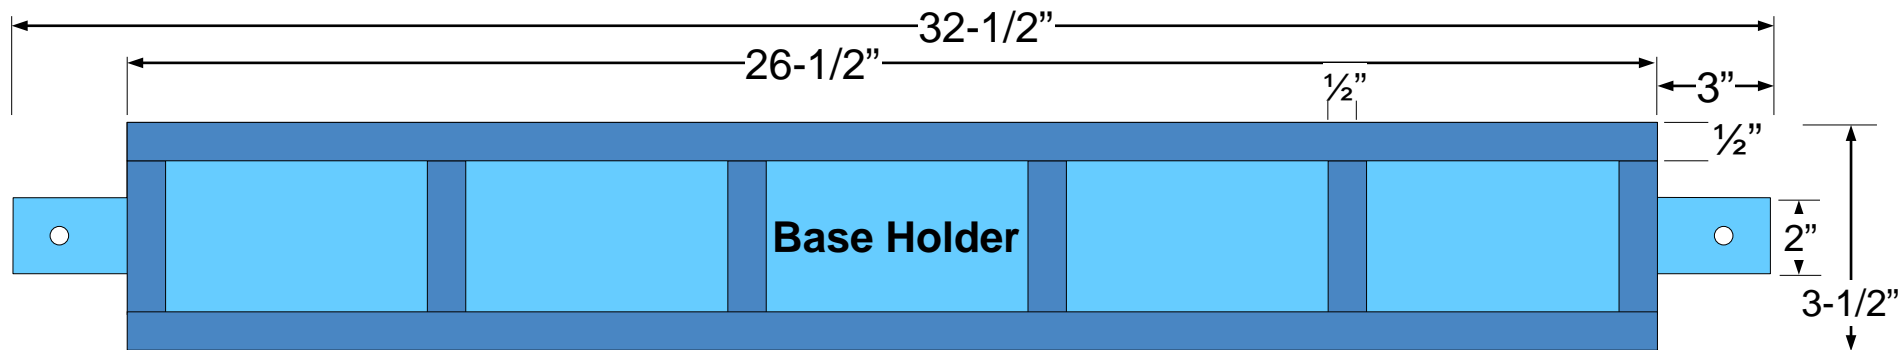
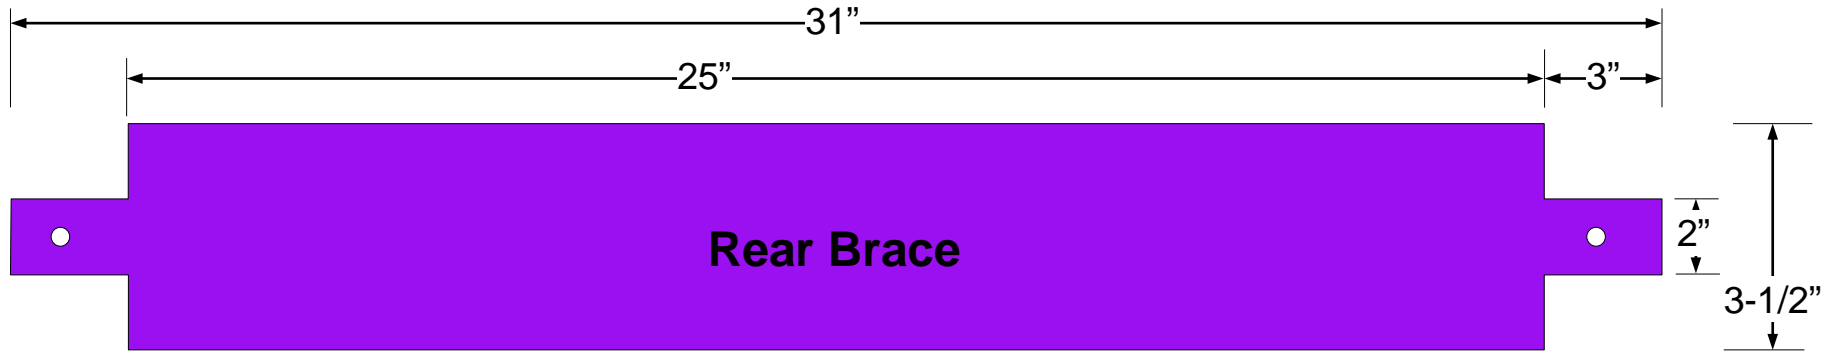


Break down Lance rack


Cut one of each of these for each rack


(drawings not to scale)

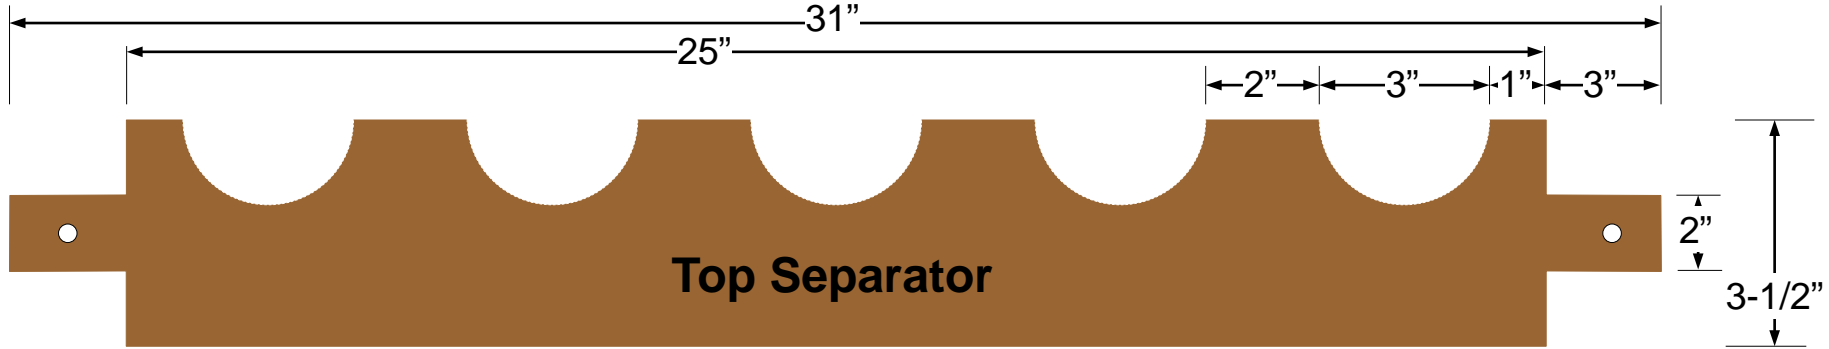


Cut two these (as shown) for each rack

Side View

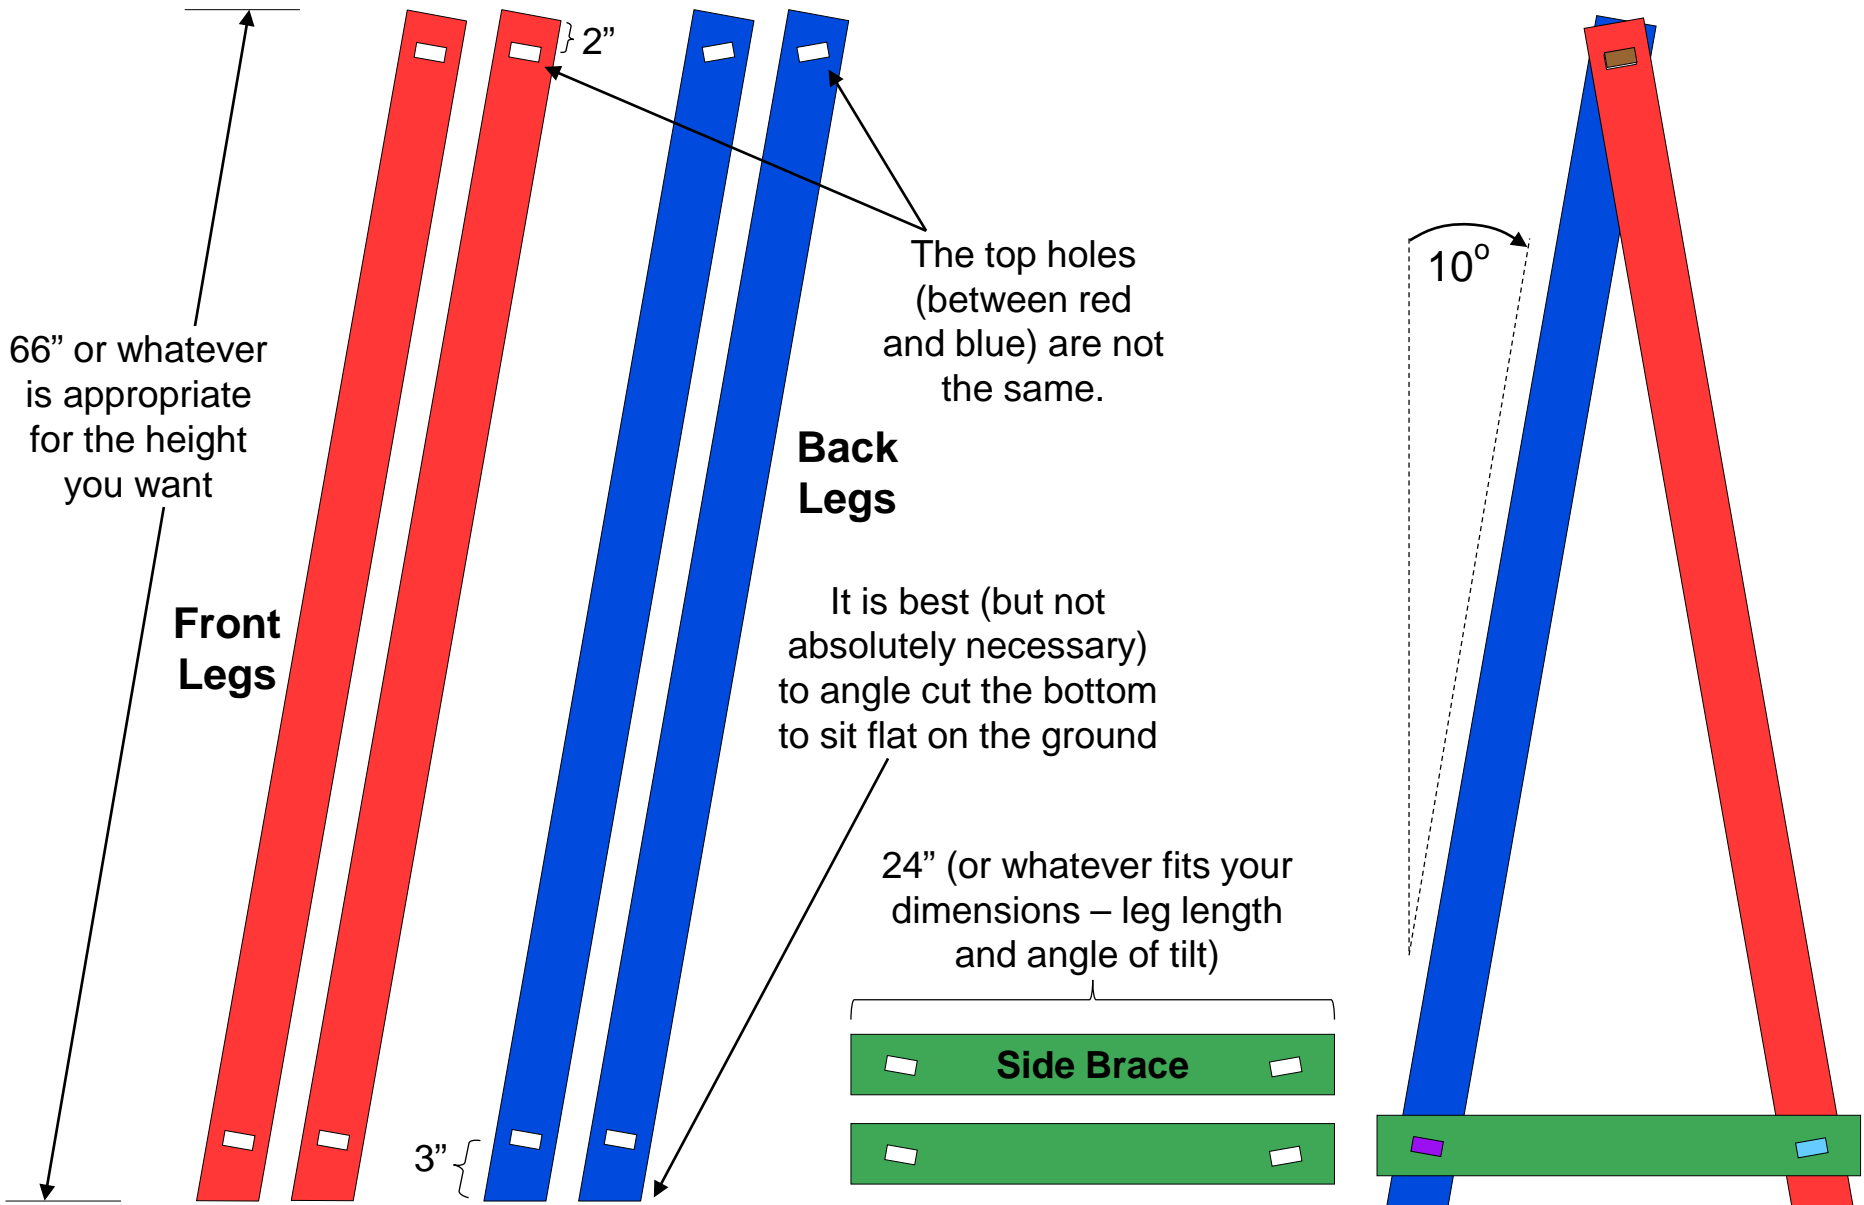

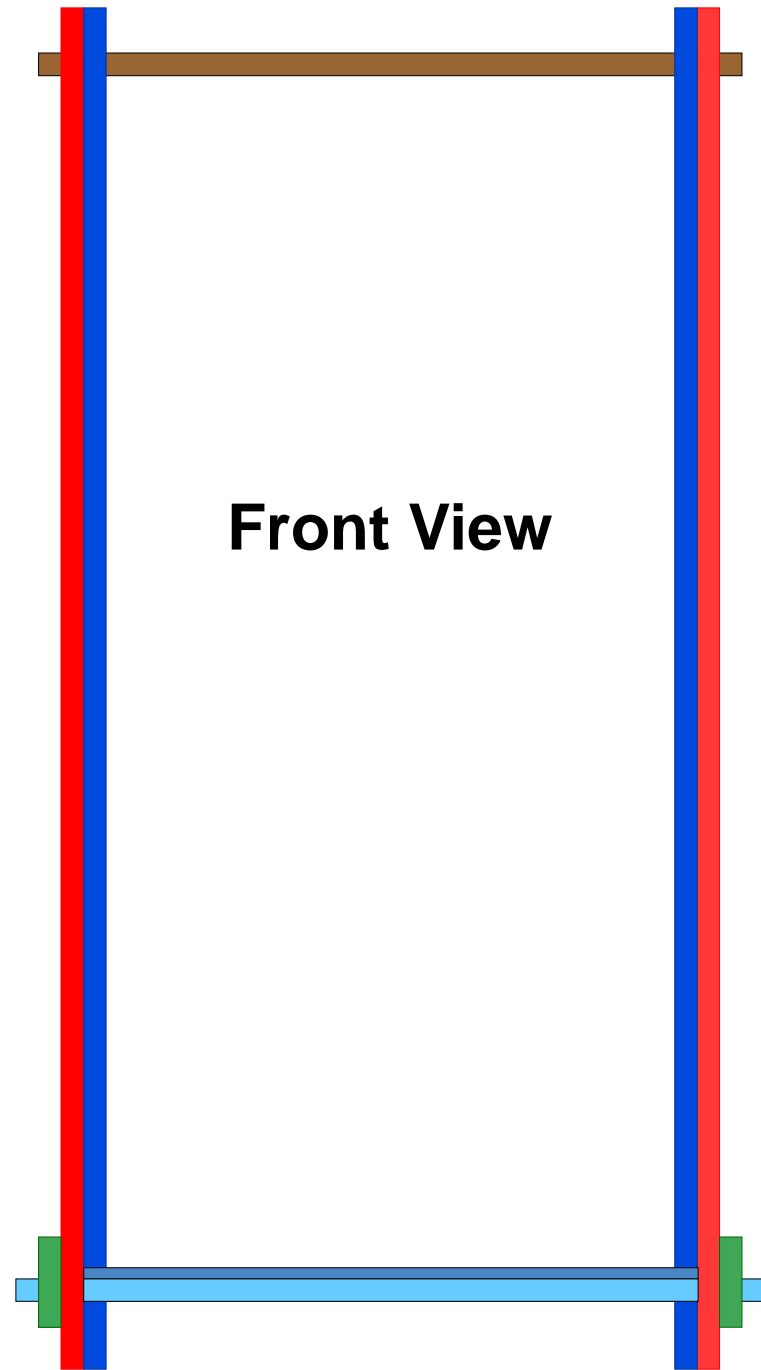


If you don't want the side braces angled, you can lengthen the rear brace tenons and insert a spacer block (the thickness of the legs) between the back legs and the side brace.

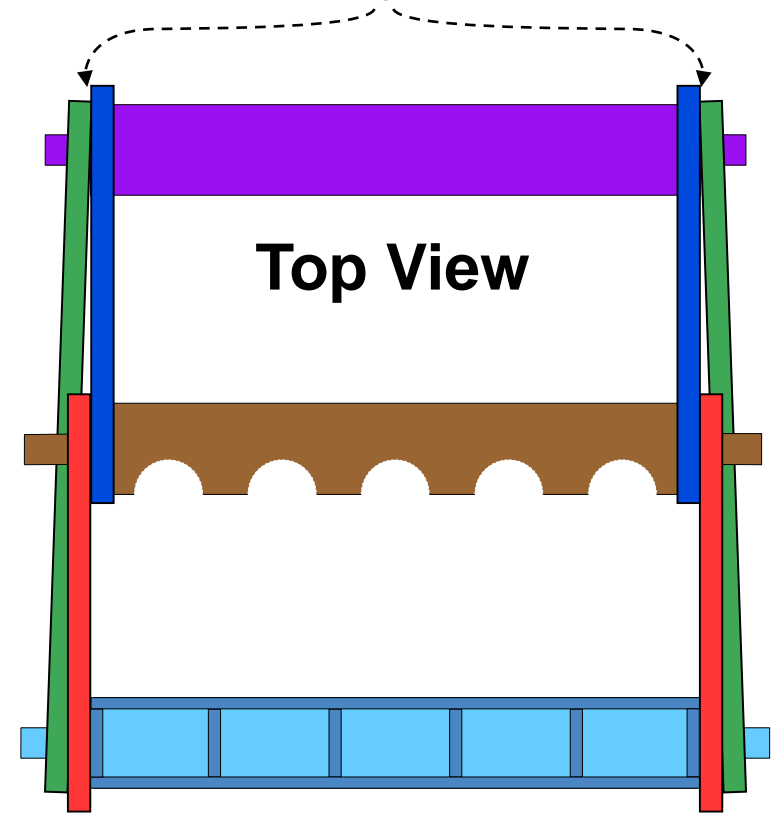

After cutting all the holes and assembling the rack, mark the sides of each outer board along the tenons so you know where the pegs need to go.

Drill peg hole centers slightly outside of leg edge line

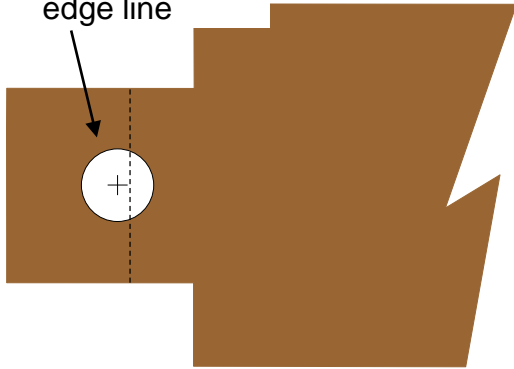

Lay out to measure and mark

